



**FOR MORE INFORMATION
CALL (818) 991-9997**

<http://www.biosolutions.org>


Hydrosplitters

Submittal
Data Sheet




Applications

Oreco Hydrosplitters are used when dosing screened effluent by pump or siphon to achieve proper distribution of flow to each lateral, regardless of length, in gravity drainfields.

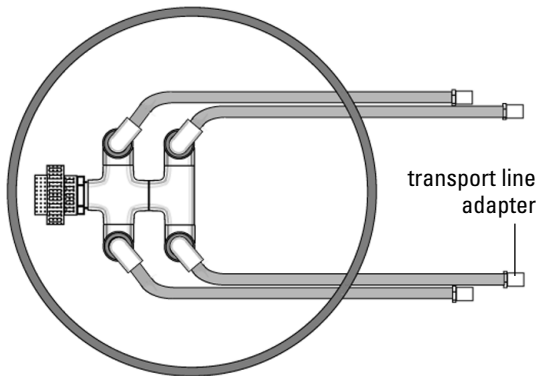

Top View (shown with PVC enclosure)

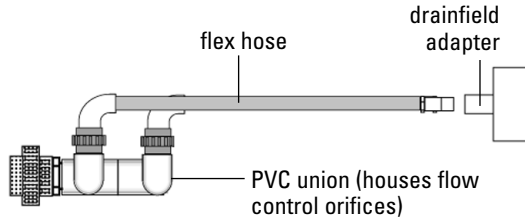

Side View

General

Oreco Hydrosplitters are fabricated with PVC components. Each hydrosplitter is designed to meet specific needs of a particular drainfield. Order PVC enclosure and fiberglass lid separately.

Standard Models

None. Hydrosplitters are built to specification.

Nomenclature

HSA X - X
 L — Indicates line diameter
 L — Indicates number of lines

HS RR XX XX
 L — Indicates riser height
 L — Indicates riser diameter
 L — Indicates access riser

Specifications

Component	Sizes Available (in.)	Specification(s)
PVC Fittings	1/2, 3/4, 1, 1-1/4, 1-1/2, 2, 3, 4	Sch. 40 PVC
Unions	1/2, 3/4, 1, 1-1/4, 1-1/2, 2, 3, 4	Sch. 80 PVC
Flexible Hose	1/2, 3/4, 1, 1-1/4, 2	PVC
Flow Controllers	1/2, 3/4, 1, 1-1/4, 1-1/2, 2, 3, 4	Sch 80 PVC, 1/8" thick
Enclosure	21, 24, 30 (dia.), 18" minimum height	See <i>Access Risers</i> submittal sheet for more information
Fiberglass Lid	21, 24, 30 (dia.)	See <i>Fiberglass Access Lids</i> submittal sheet for more information