


Fiberglass and ASA Caps

Applications

Orenco's Fiberglass Caps and ASA Caps are used as access covers for valve boxes and tank hatches. These lids are rated for pedestrian traffic only.

- FL8 ASA caps fit 8-inch dia. IPS pipe, 8.63-inch (219 mm) O.D.
- FL12 caps fit 12-inch dia. PIP pipe, 12.24-inch (311 mm) O.D.
- FL12GTU caps fit 12-inch dia. Ultra-Rib™ pipe, 13.1-inch (333 mm) O.D.
- FL15 caps fit 15-inch dia. PIP pipe, 15.3-inch (389 mm) O.D.

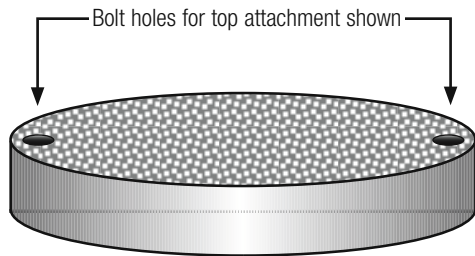

General

Orenco Fiberglass Caps are molded using fiberglass reinforced polyester resin. Both non-skid (standard) and smooth surfaces are available. FL8 caps are molded using ASA (acrylic styrene acrylonitrile). Fiberglass caps and ASA caps are available with or without bolt holes and gaskets. FL12 and FL15 caps are available with optional factory-installed insulation.


Standard Models

FL8G, FL8GT, FL8GS

FL12G, FL12GT, FL12GS, FL12GTU, FL12GTI2, FL12GTI4

FL15G, FL15GT, FL15GS, FL15GI2, FL15GTI2, FL15GTI4

Product Code Diagram

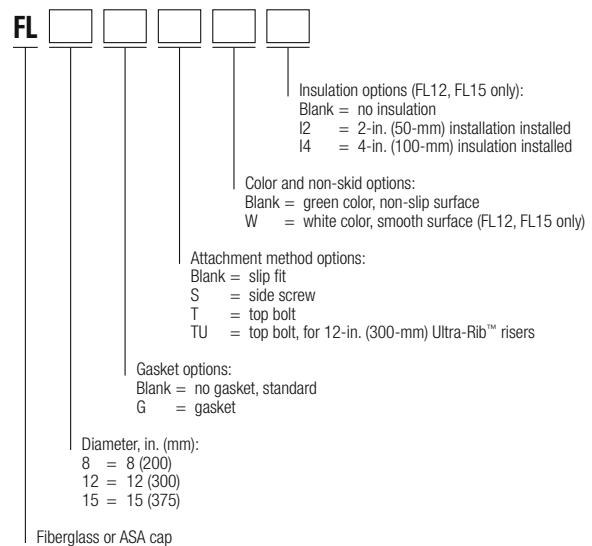

Materials of Construction

FL8	ASA
FL12, FL15	Fiberglass
Gasket	Polyurethane
Insulation (optional)	Closed-cell foam
Insulation mounting hardware	Stainless steel

Specifications

Dimensions	FL8XX	FL12XX	FL12GTU	FL15XX
O.D. in. (mm)	9 (229)	12 1/2 (318)	13 3/4 (349)	15 5/8 (397)
I.D. in. (mm)	8 5/8 (219)	12 1/4 (311)	13 3/8 (339)	15 3/8 (391)
Top thickness in. (mm)	3/16 (4.8)	3/16 (4.8)	3/16 (4.8)	3/16 (4.8)
Lip thickness in. (mm)	3/16 (4.8)	1/8 (3.2)	1/8 (3.2)	3/16 (4.8)