
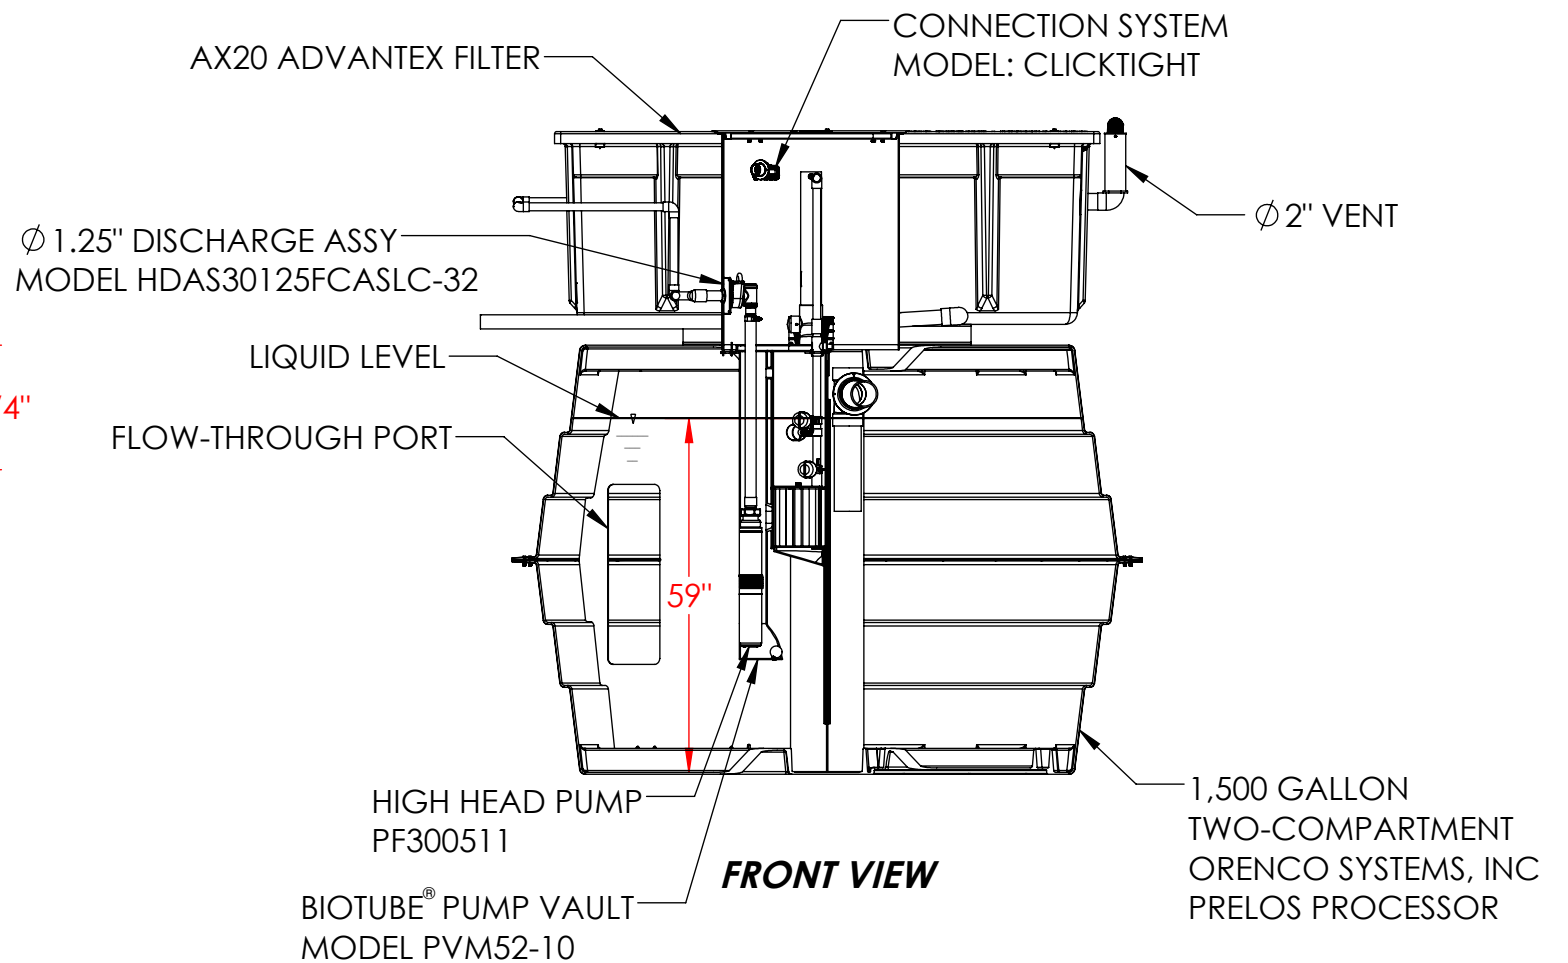
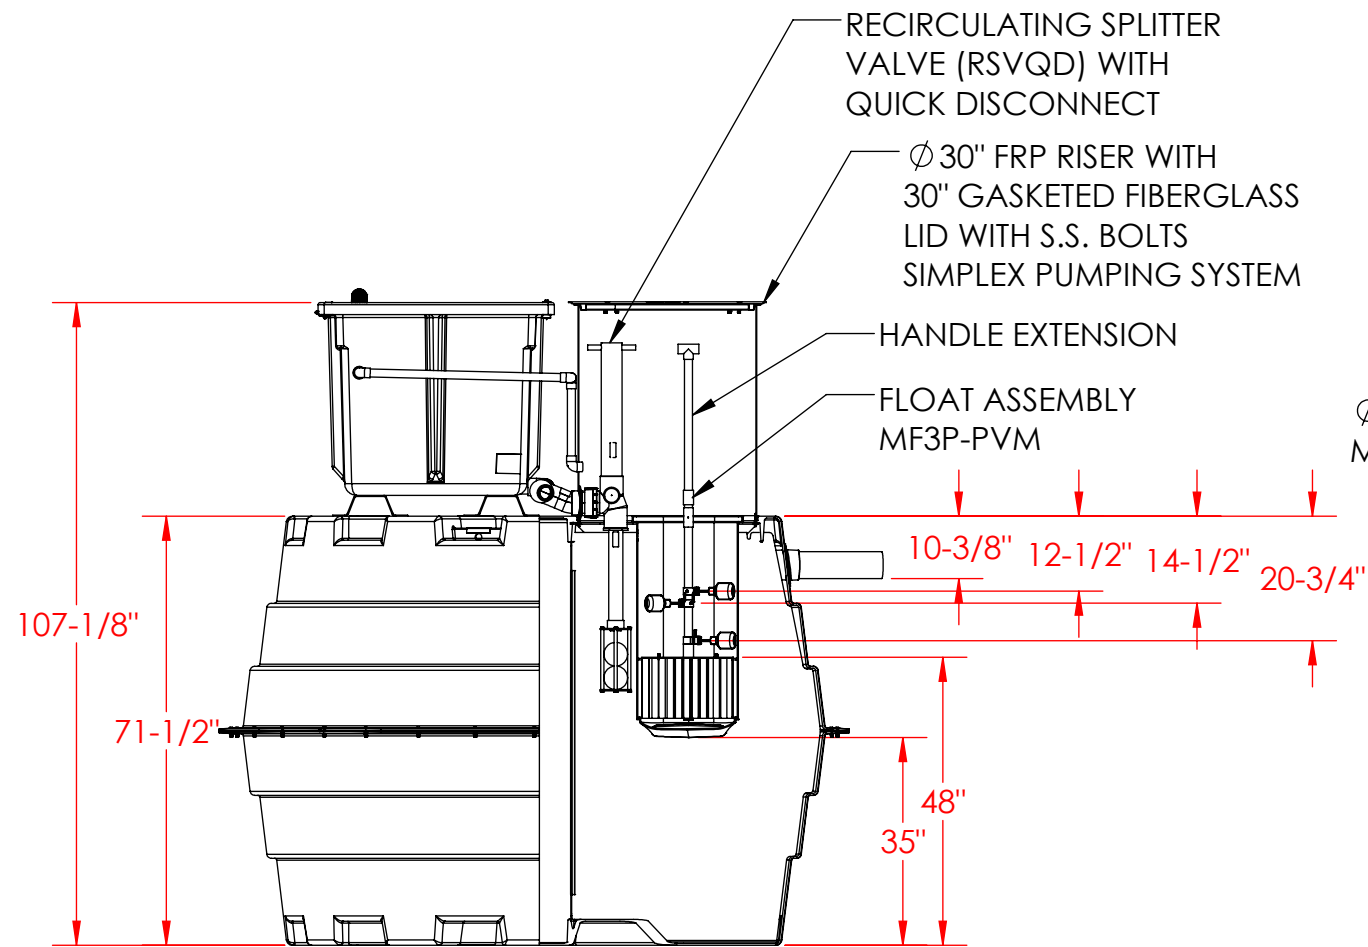


DESIGN NOTES:
 EXPECTED FLOWS
 Q-PEAK = 600 GPD

EXPECTED INFLUENT QUALITY
 GREASE & OIL: 20 MG/L
 BOD: 150 MG/L
 TSS: 40 MG/L
 TKN: 65 MG/L

TYPICAL EFFLUENT QUALITY
 BOD: <10 MG/L
 TSS: <10 MG/L
 TN: <25 MG/L

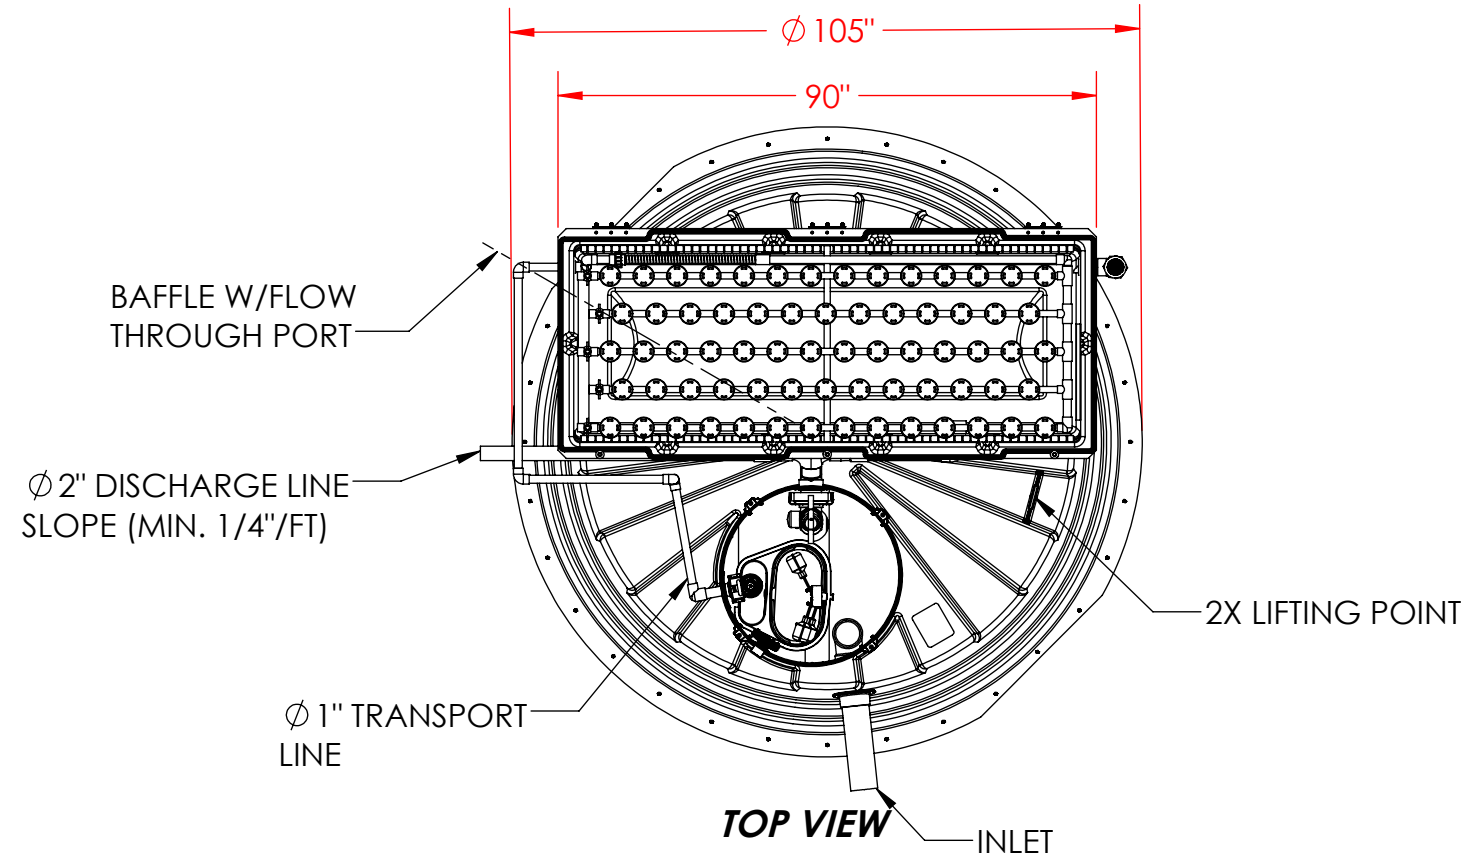

UNLESS SPECIFIED:
 DIMS. ARE INCHES
 TOLERANCES:
 FRACTION: \pm 1/16"
 ANGULAR: \pm .5°
 DECIMAL: \pm .02
 CRITICAL: \pm .005

DATE: 1/22/2021
 DATE APRVD:
 SHEET(S): 1 OF 1

DRAWN BY: BNEAL
 APRVD BY:
 REVISION:
 NAME: M1500-AX20-MODE3B
 DESCRIPTION: PRELOS/ADVANTEX M1500 AX20 MODE 3B
 MATERIAL:

© Orenco Systems®, Inc.
 This Manufacturing Drawing is CONFIDENTIAL and may only be used internally or by Orenco's suppliers to manufacture products for Orenco. This Manufacturing Drawing may not be used for any other purpose, and may not be disclosed to third parties.

