

AX20RTUV Treatment System - UV with Pump Discharge

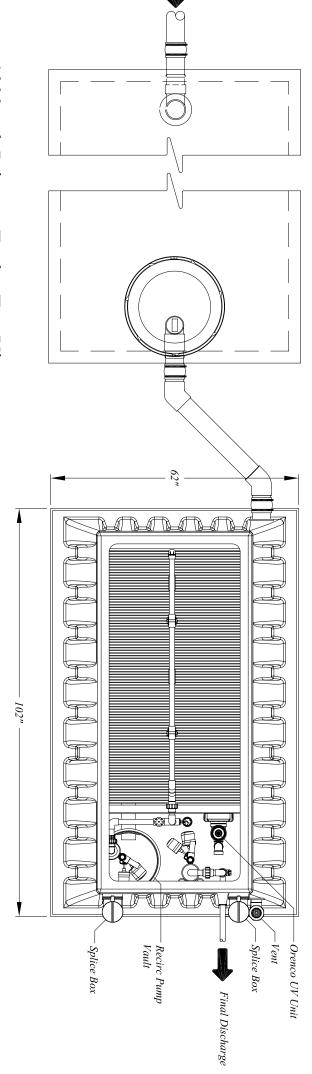

Inlet


Filter Tank Dry Weight: 900 lbs Design and Installation Notes

- For Expected Flows 4 Bedrooms or less
- Start-up And Service To Be Performed By An AdvanTex Trained Service Provider
- Installation To Be Performed By An AdvanTex Trained Installer Only



1000 gal. Primary Tank - Top View

AX20 800 gal. Recirc. Tank - Top View

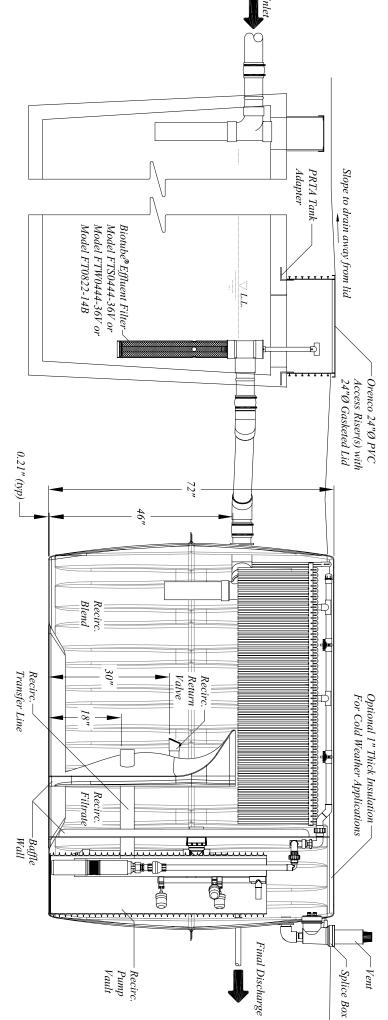

ligh Level Alarm

High Level Override

High Leve

δ

Orenco UV Unit

Alarm

||Varies

OFF

AX20 800 gal. Recirc. Tank - Side View

Orenco Discharge -Pump System Orenco Recirc. Pump System

Discharge Chamber - End View Copyright © 2011

Orenco Systems®, Inc.

AX20RTUV Mode 1B NDW-ATX-RT-STD-02 Sheet: Scale: Rev: **A-03** /" = 2'-0"Date: 8/08/2011 9

Project:

Title:

Unauthorized Changes & Uses

1000 gal. Primary Tank - Side View

Orenco has prepared these drawings for use by the design engineer. Orenco will not be responsible or liable for unauthorized changes to or uses of these drawings. All changes to these drawings must be made in writing and must be approved by the

PRODUCT CONFIGURATION DRAWINGS

Orenco Systems Incorporated

Changing the Way the World Does Wastewater®

Drawn For: Drawn By: BEN SMITH