



Carbon Filters for Fiberglass Lids

Applications

Orenco carbon filters for fiberglass lids reduce the odor of sewage gases in the air that passes through the filter.

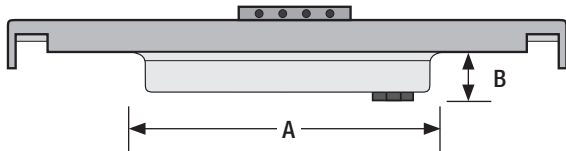

Side view (installed on uninsulated lid)

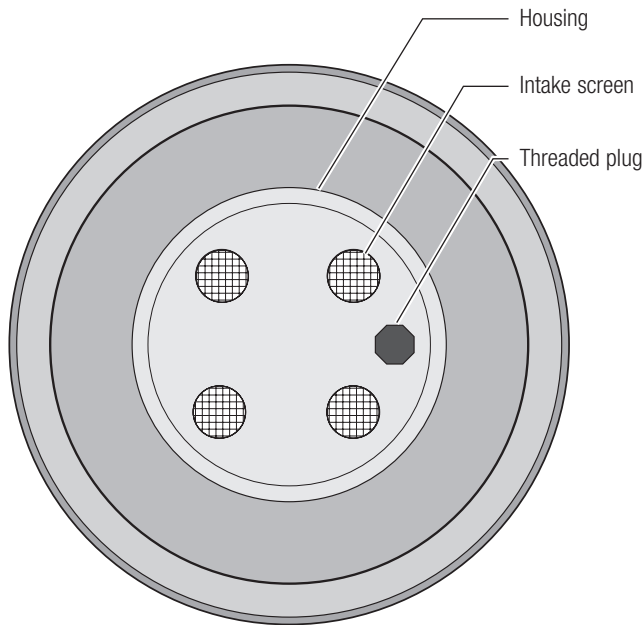

Bottom view (installed on uninsulated lid)

General

The carbon filter housing is injection molded using fiberglass reinforced polyester resin. A threaded plug allows the replacement of carbon in the filter (refill packs available).

Orenco carbon filters for fiberglass lids are typically purchased as add-on items to Orenco fiberglass access lids. When ordered with uninsulated riser lids, the filters come attached directly to the lids with epoxy. When ordered with insulated lids, the filters come secured to the lids by a threaded fitting.

Standard Model

CF12

Materials of Construction

Carbon	Granular activated impregnated carbon
Housing	Molded fiberglass
Screen	Polyethylene
Plug	Schedule 40 PVC

Specifications

Dimensions

A, in. (mm)	14.75 (375)
B, in. (mm)	2.75 (70)
Screen mesh, in. (mm)	0.125 (32)
Carbon weight, lb (kg)	3.25 (1.47)