Orenco WATER

Technical Data Sheet

FRP Bulk Riser Pipe

Applications

Orenco bulk fiberglass-reinforced polymer (FRP) pipe can be cut and processed into septic tank access risers.

IMPORTANT *Do not use Orenco FRP pipe at lengths greater than 8ft (2.4m). Structural integrity can be compromised.*

General

Orenco offers 10ft (3m) lengths of bulk FRP pipe in 24in (600mm) and 30in (750mm) diameters. Truckload quantities are also available. A complete line of Orenco pipe-cutting tools makes it easy to fabricate risers in the shop or in the field. See NIN-RLA-RF-2, *FRP Bulk Riser Pipe Processing Instructions*, for a list of tools and fixtures.

Each riser requires four bolt catches (RFBC). When ordering, note that product code RFBC defines a single bolt catch.

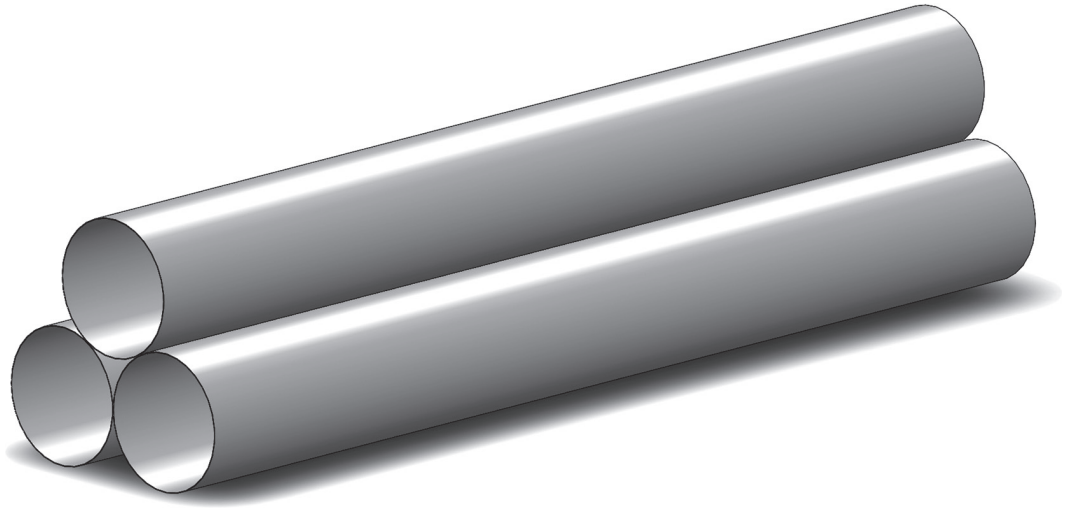

Materials of Construction

Pipe	Fiberglass-reinforced polymer
Bolt catches	Glass-filled nylon
Hardware	Stainless steel

Specifications

Model	RFP24	RFP30
Inside diameter, in (mm)	23.5 (597)	29.5 (749)
Outside diameter, in (mm)	24 (600)	30 (750)
Wall thickness, in (mm)	0.19 (5)	0.25 (6)
Weight, lb/ft (kg/m)	11 (16)	18 (27)

Truckload Quantities

Model	RFP24	RFP30
Number of feet	800	450
Number of 10ft lengths	80	45

Truckload quantities may be less based on regional shipping regulations.

Standard Models

RFP24, RFP30

Product Code Diagram

RFP [ ]

Pipe diameter, nominal, in (mm)
24 = 24 (600)
30 = 30 (750)

Orenco© FRP pipe, 10ft (3m)