

M1000P Pump Discharge Tank

Applications

Orenco's watertight M-Series molded DCPD tank* is optimized for multiple uses, including septic tanks and dosing tanks in onsite wastewater collection and treatment systems (residential and commercial), as well as in community-wide, liquid-only sewer systems. It collects and digests organic matter, providing primary wastewater treatment by reducing BOD and TSS by 65% and 70% or better, respectively.**

These tanks are not tested for use with potable water.

Product Code Diagram

M 1000 P

Discharge option:
P = pump discharge

Tank size, gal. (L):
1000 = 1000 (3785)

M-series meander-type tank

Features

- 1000-gallon (3785-L) meander-type tank for longer settling times and better solids retention
- 100% watertight design; each assembled tank is tested for watertightness before shipping
- DCPD construction for structural durability and chemical resistance
- Injection molded for unmatched consistency and quality
- Sized for transport by a light pickup or small trailer
- Lightweight enough for lifting and installation with a backhoe
- Ideal for small and tight lots
- 30-in. (750-mm) access riser opening


Orenco's watertight M1000P tanks are lightweight, durable, and versatile. (Pumping components, access riser, and lid sold separately.)




* Tanks covered under United States Patent #10,392,281.

** Gabriel Bitton, *Wastewater Microbiology*, 3rd Ed. (Hoboken, New Jersey: John Wiley & Sons, 2005), 361.

Note: Listed by IAPMO/UPC. These tanks are not designed for use in a location that receives vehicle traffic. Placement in a traffic area requires an engineered traffic-bearing pad.

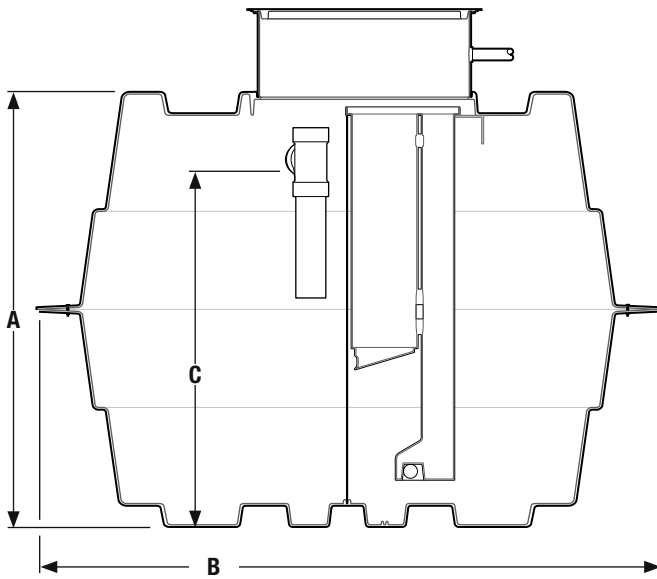

Side sectional view, M1000P (pump vault sold separately)

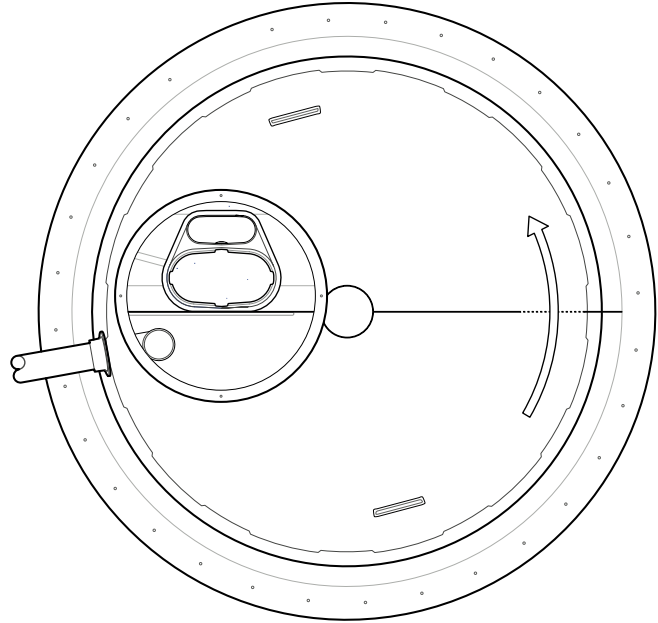

Top sectional view, M1000P (pump vault sold separately)

Materials of Construction

Inlet	ABS
Tank body	DCPD
Support column	PVC, ABS
Baffle wall	ABS

Specifications

Tank nominal operating volume, gal. (L)	1000 (3785)
Tank total volume, gal. (L)	1220 (4618)
Average volume at operating depth, gal./in. (L/mm)	20 (3)
Weight, nom., lbs (kg)	400 (181)
A. Tank height, in. (mm)	61 (1549)
B. Tank outside diameter, in. (mm)	96 (2438)
C. Invert of inlet height, in. (mm)	51.3 (1303)