


Recirculating Ball Valve

Applications

Orenco[®] Recirculating Ball Valves provide flow diversion for recirculation purposes in onsite septic systems.

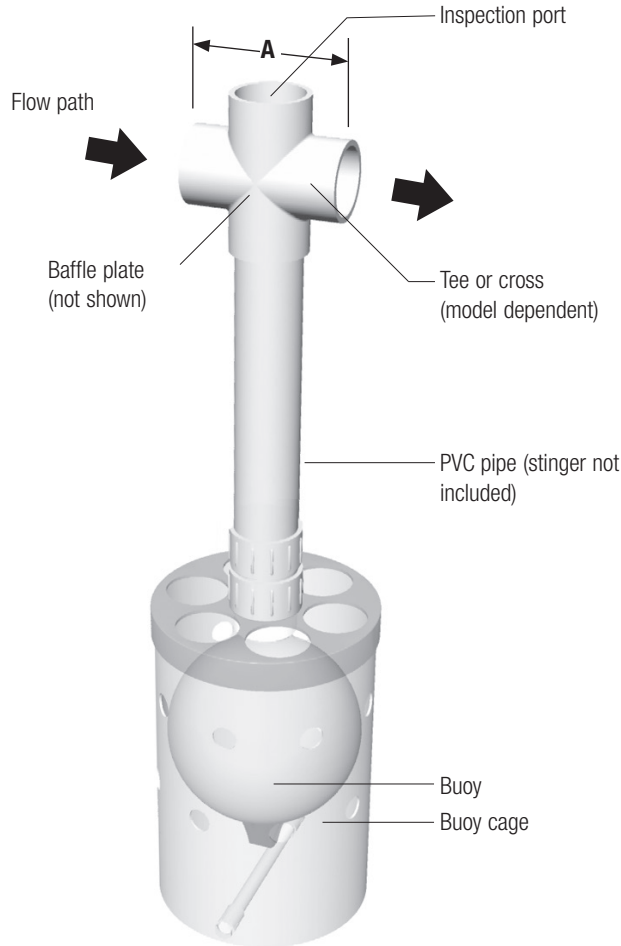

Orenco[®] Recirculating Ball Valve


General

Orenco Recirculating Ball Valves are constructed of PVC and rubber components for corrosion resistance. The valve redirects 100% of the incoming flow to the recirculation tank during periods in which the ball is not seated, and 0% when the ball is seated. An inspection port is provided for routine maintenance.

Standard Models

MM3, MM4, MM6

Product Code Diagram



Materials of Construction:

Pipe and Fittings PVC Sch. 40 per ASTM specification

Buoy Rubber

Specifications

Model	MM3	MM4	MM6
(A) Tee width, in.(mm)	8 (203)	9 (228)	12 (305)
Stinger pipe dia., in.(mm) nominal	3 (80)	3 (80)	4 (100)
Cage height, in.(mm)	19.25 (489)	19.25 (489)	24.25 (616)
Cage diameter, in.(mm) nominal	12 (300)	12 (300)	15 (375)
Buoy diameter, in.(mm)	11.5 (292)	11.5 (292)	14.5 (368)